


## OKS 420 High-Temperature Multipurpose Grease

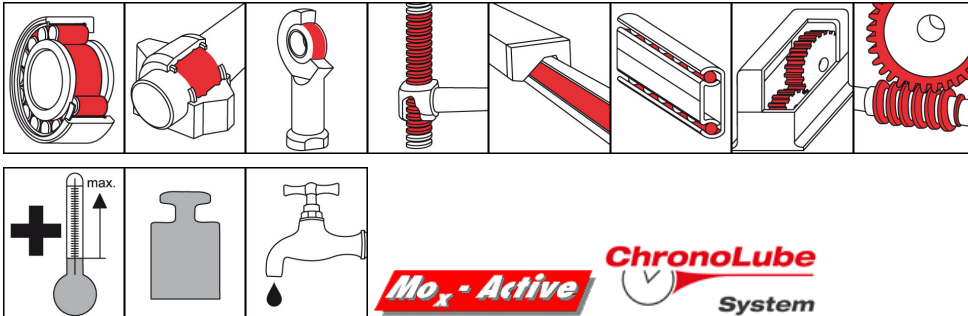

### Description

OKS 420 is a high-temperature grease for universal use at increased requirements.

### Applications

- Gearbox lubrication of heavily loaded, relatively slow-running toothed gearing when grease is used instead of oil due to leaks
- For heavily loaded and impact-loaded drives
- Chain lubrication, e.g. of hollow-pin chains in the conveyance and transport sector, for exposure to water and steam and at higher operating temperatures
- Bearing lubrication of friction and rolling bearings in annealing yards and drying systems, manipulators and robots, cooling-bed and conveyor systems, machines in food packing industry, steam sterilisers etc.

### Advantages and benefits

- Excellently suited for corrosive operating conditions with high operating temperatures and high pressure and impact loads
- Economical due to optimised formula
- Enables wear reduction, decreasing failure times and enabling long-term lubrication
- Long-acting, highly adhesive, temperature-stable and waterproof, noise-damping, impact and pressure resistant

### Branches

- Rubber and plastic processing
- Glass and foundry industry
- Plant and machine (tool) engineering
- Chemical industry
- Paper and packaging industry
- Shipbuilding and marine technology
- Municipal services
- Rail vehicle technology
- Iron and steel industry
- Logistics



## PRODUCT INFORMATION

# OKS 420

## High-Temperature Multipurpose Grease

### Application tips

For best results clean the lubricating point carefully. Clean with solvents like OKS 2610/OKS 2611 Universal Cleaner. Remove the corrosion protection ahead of the initial filling. Fill the bearings in a way that all the functional surfaces for sure get the grease. Slow moving bearings (DN-value < 50,000) should be filled completely, normal moving bearings should be filled to 1/3 of the free inner housing space. Observe the instructions of the bearing or machine manufacturer. Relubrication with a grease gun on to the grease nipples or with an automatic lubrication system. Relubrication intervals and amount to be defined acc. to the service conditions. If the removal of the old grease is not possible the amount of grease has to be limited to avoid excess lubrication of the bearing. At longer relubrication intervals a complete exchange of the old grease is recommended. Only mix with appropriate lubricants

### Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock
- 180 kg Drum

### Technical Data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				mineral oil
thickener				polycarbamide
additives				Mo <sub>x</sub> -Active
<b>Application related technical data</b>				
marking	analogue to DIN 51 502			KP1-2P-10
viscosity at (40°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	490
viscosity at (100°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	32
drop point	IP 396		°C	> 230
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	1-2
worked penetration	DIN ISO 2137	60DH	0.1 mm	290-320
lower operating temperature	DIN 51 805	≤ 1400hPa	°C	-10
upper operating temperature			°C	160
colour				beige
density (at 20°C)	DIN 51 757		g/cm <sup>3</sup>	0.9
water resistance	DIN 51 807-1	3h/90°C	Degree	1-90
DN value (dm x n)			mm/min	300,000
four-ball test rig wear	DIN 51 350-5	1.420/min, 1h, 800N	mm	< 1.0

### OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47  
 82216 Maisach  
 Phone: +49 (0) 8142 3051 - 500  
 info@oks-germany.com  
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark  
**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com). Our Customer and Technical service will be pleased to help should you have any further questions.