


OKS 472

Low-Temperature Grease for Food Processing Technology

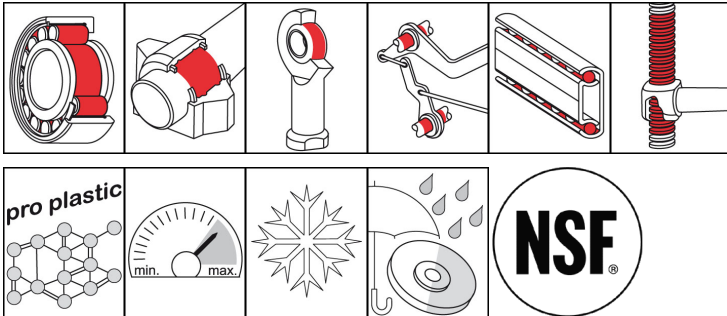

Description

White fully synthetic low-temperature grease with NSF H1 certification for food processing technology.

Applications

- Grease lubrication of friction and rolling bearings at low operating temperatures
- Grease lubrication of friction and rolling bearings at high speeds
- Grease lubrication of bearings with low coasting moments or low bearing play

Advantages and benefits

- NSF H1 registered
- Low-viscosity, fully synthetic base oil ensures the functionality of the lubricating film up to -70°C
- Very good conveying capability in central lubricating systems also at low temperatures

Branches

- Glass and foundry industry
- Plant and machine (tool) engineering
- Shipbuilding and marine technology
- Iron and steel industry
- Catering equipment and food processing technology
- Logistics
- Municipal services
- Rail vehicle technology
- Chemical industry
- Paper and packaging industry
- Rubber and plastic processing



PRODUCT INFORMATION

OKS 472

Low-Temperature Grease for Food Processing Technology

Application tips

Clean the surfaces for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing, high-speed bearings (DN value above 400,000) up to about 1/4. Low-speed bearings (DN value < 50,000) and their housings should be filled completely. In as far as available, the bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication systems Assess the lubrication frequency and quantity on the basis of the service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid over-lubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Caution: Only mix with suitable lubricants.

Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock

Technical Data

| | Standard | Conditions | Unit | Value |
|---|-----------------|-------------------------|--------------------|-------------------------|
| Main components | | | | |
| base oil | | | | polyalphaolefine |
| base oil | | | | ester |
| thickener | | | | aluminium-complex soap |
| Application related technical data | | | | |
| marking | DIN 51 502 | DIN 51 825 | | KHC1K-40 |
| viscosity at (40°C) | DIN 51 562-1 | base oil | mm ² /s | 30 |
| viscosity at (100°C) | DIN 51 562-1 | base oil | mm ² /s | 6 |
| pour point | DIN ISO 3016 | 3°C step | °C | < -70 |
| flashing point | DIN ISO 2592 | > 79 | °C | > 200 |
| drop point | DIN ISO 2176 | | °C | > 220 |
| consistency | DIN 51 818 | DIN ISO 2137 | NLGI grade | 1 |
| worked penetration | DIN ISO 2137 | 60DH | 0.1 mm | 310-340 |
| lower operating temperature | DIN 51 805 | ≤ 1400hPa | °C | -45 |
| upper operating temperature | DIN 51 821-2 | F50 (A/1500/6000), 100h | °C | 120 |
| colour | | | | whitish |
| density (at 20°C) | DIN EN ISO 3838 | | g/cm ³ | 0.9 |
| water resistance | DIN 51 807-1 | 3h/90°C | Degree 0-3 | 1 |
| DN value (dm x n) | | | mm/min | 800,000 |
| SKF-EMCOR Copper | DIN 51 811 | 24h, 100°C | corr. degree | 1 |
| Properties and approvals | | | | |
| approval for food processing technology | | | | NSF H1, Reg.-Nr. 135749 |



OKS 472

Low-Temperature Grease for Food Processing Technology

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
82216 Maisach
Phone: +49 (0) 8142 3051 - 500
info@oks-germany.com
www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com. Our Customer and Technical service will be pleased to help should you have any further questions.