
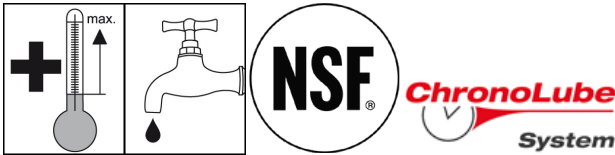


OKS 479

High-Temperature Grease for Food Processing Technology

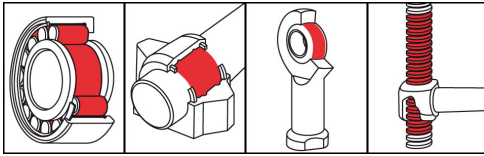

Description

OKS 479 is a fully synthetic grease for food processing technology that is used to lubricate rolling and friction bearings as well as other machine elements under increased operating temperatures.

Applications

- Lubrication of rolling and friction bearings, joints, linear drives, guides
- For the lubrication of fittings, seals, moulded parts and elements of elastic rubber materials in the hot- and cold-water segment

Branches

- Logistics
- Shipbuilding and marine technology
- Catering equipment and food processing technology
- Paper and packaging industry
- Plant and machine (tool) engineering
- Municipal services
- Iron and steel industry
- Chemical industry
- Rail vehicle technology
- Rubber and plastic processing
- Glass and foundry industry

Advantages and benefits

- NSF H1 registered
- Can be used universally due to good high-temperature properties, long-term lubricating effect and good adhesive strength on metal surfaces
- Resistant to hot and cold water, water vapour, watery-alkaline and acidic disinfectants and cleaning agents
- High resistance to oxidation and ageing

Application tips

Clean the lubricating points well for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing. Low-speed bearings (DN value below 50,000) and their housings should be filled completely. In as far as available, the bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Assess the lubrication frequency and quantity on the basis of the service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid over-lubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Caution: Only mix with suitable lubricants.



PRODUCT INFORMATION

OKS 479

High-Temperature Grease for Food Processing Technology

Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock

Technical Data

	Standard	Conditions	Unit	Value
Main components				
base oil				polyalphaolefine
thickener				aluminium-complex soap
Application related technical data				
marking	analogue to DIN 51 502	DIN 51 825		KPHC1K-30
viscosity at (40°C)	DIN 51 562-1	base oil	mm ² /s	360
viscosity at (100°C)	DIN 51 562-1	base oil	mm ² /s	37
drop point	DIN ISO 2176		°C	> 240
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	1
worked penetration	DIN ISO 2137	60DH	0.1 mm	310-340
lower operating temperature	DIN 51 805	≤ 1400hPa	°C	-35
upper operating temperature	DIN 51 821-2	F50 (A/1500/6000), > 100h	°C	120
colour				beige
density (at 20°C)	DIN EN ISO 3838		g/cm ³	0.91
water resistance	DIN 51 807-1	3h/90°C	Degree 0-3	1-90
DN value (dm x n)			mm/min	500,000
four-ball test rig welding load	DIN 51 350-4		N	2,200
SKF-EMCOR	DIN 51 802	7 days, distilled water	corr. degree	1
Properties and approvals				
approval for food processing technology				NSF H1, Reg.-Nr. 135675

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
 82216 Maisach
 Phone: +49 (0) 8142 3051 - 500
 info@oks-germany.com
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com. Our Customer and Technical service will be pleased to help should you have any further questions.